
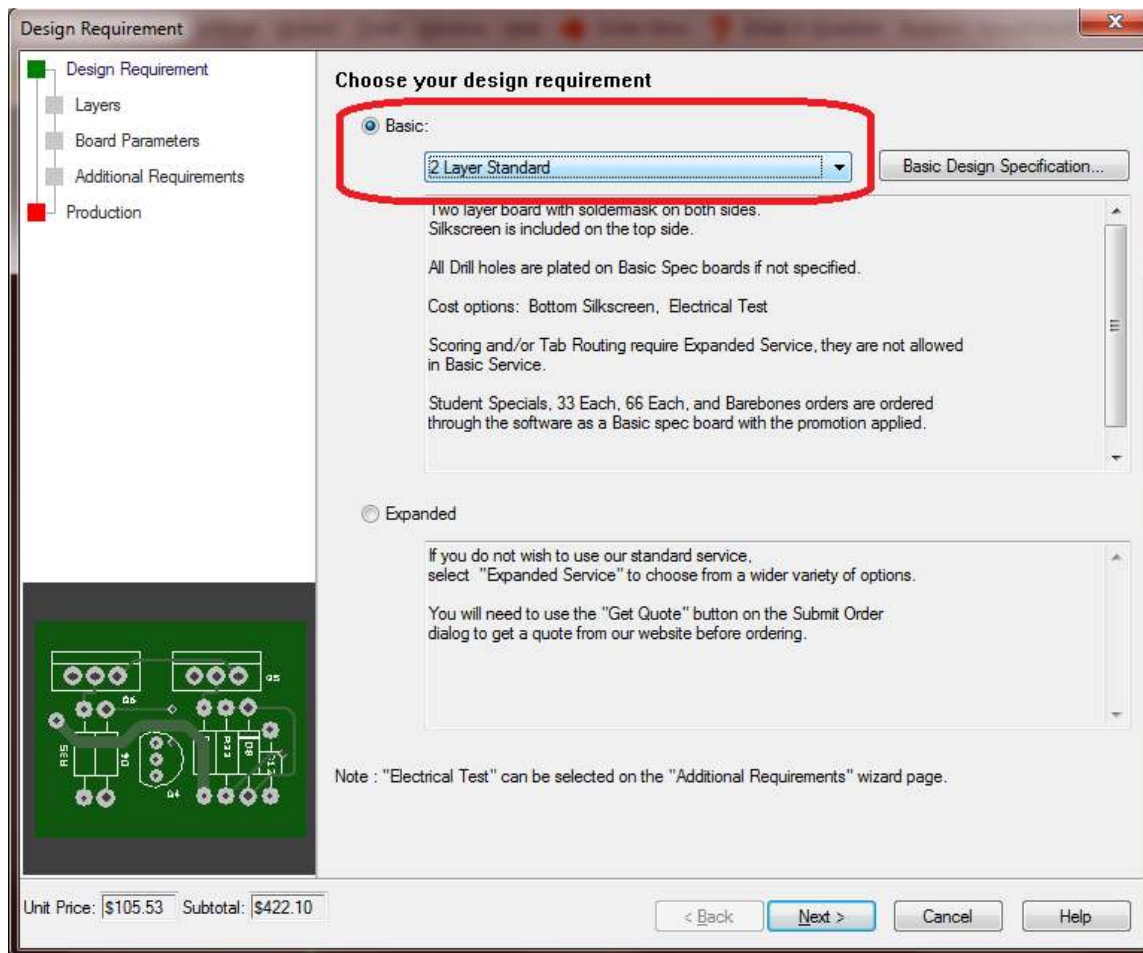


### 33 Specials and 66 Specials In PCB Artist


Ordering 33 specials or 66 specials in PCB Artist requires the customer to order through the PCB Artist software. First make sure your board design is in "Basic Spec". Go to Settings>PCB Configuration to check.

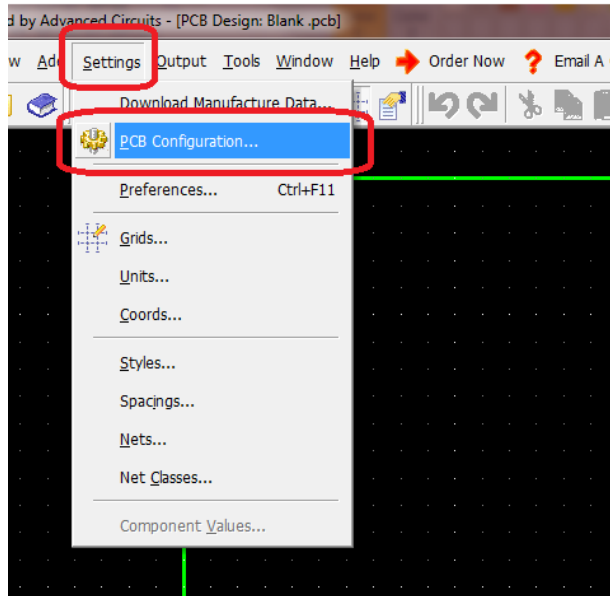

The PCB Configuration is also where one can set up the board order. Make sure your order matches the 33 special or 66 special specs found here: <https://www.4pcb.com/pcb-prototype-2-4-layer-boards-specials.html>

Click Finish on the production section to save the changes in the PCB Configuration.

To order, click the Order Now link at the top of the software:

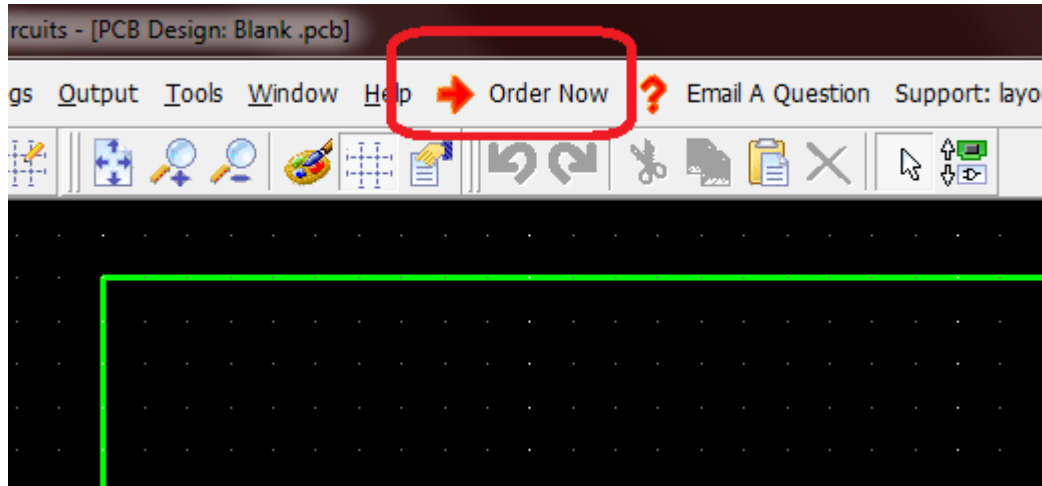

A gray box will pop to fill out. Ignore the pricing here as the promotion has not been applied yet.

Put in your log in information for Advanced Circuits (4pcb.com).

In the promotion section, put 33each or 66each (depending on the order type):

A screenshot of the 'Submit Order' dialog box. It has a title bar with a close button. Inside, there's a section titled 'READ THIS FIRST' with instructions. To the right are buttons for 'How To Place Your Order...', 'Email A Question...', and 'PCB Configuration Report...'. The 'Total Cost' is displayed as '\$422.10'. There are input fields for 'Promotion Code' (containing '33each'), 'Advanced Circuits Account User Email' (containing 'customer e-mail'), and 'Advanced Circuits Password' (containing '\*\*\*\*\*'). At the bottom are buttons for 'Place Order...', 'Get Quote...', 'Close', and 'Cancel'.

Click Place Order.

If there are no errors you will reach an upload page. Click the choose file button and navigate to your (filename) .pcb or newly created .fab file.

Once the file is selected, click the blue Upload button.

From here you'll be in the normal ordering system for Advanced Circuits. Fill out payment, shipping and ITAR information and proceed forward with the order.